

L 04926-67 ENT(1) IJP(c) GG/GW/WW

ACC NR: AP6019513

SOURCE CODE: UR/0362/66/002/002/0149/0163

AUTHOR: Shifrin, K. S.; Chaynova, E. A.

ORG: Main Geophysical Observatory (Glavnaya geofizicheskaya observatoriya); Central Aerologic Observatory (Tsentral'naya aerologicheskaya observatoriya)

TITLE: Determination of the particle spectrum from the scattering function

SOURCE: AN SSSR. Izvestiya. Fizika atmosfery i okeana, v. 2, no. 2, 1966, 149-163

TOPIC TAGS: particle distribution, particle spectrum, light dispersion, light scattering

ABSTRACT: Methods for the gathering of information from scattered light concerning the spectra of particles of dispersive systems are important for the optics of turbide media. From the mathematical point of view, an efficient method is needed for the solution of the first order integral equation

$$I(\beta) = \int_0^{\infty} I(\beta, r) f^*(r) dr,$$

where $f^*(r)$ is the sought for particle size distribution curve; $I(\beta, r)$ is the scattering function of individual particles of radius r ; and β is the scattering angle. The present authors discuss

Card 1/2

UDC: 551.521.3:535.361

L 04926-67
ACC NR: AP6019513

the kernel of the integral equation, the outline of the direct problem, and the formulation and calculation of the inverse problem. The stability of the calculational scheme for the inversion of the angular scattering function onto the particle spectrum for a wide range of dispersion systems with γ -distributions is investigated and the results of numerous calculations of polydispersion scattering functions are presented for such systems together with the determination of the particle sizes for which such inversion is possible. Tables containing calculated values of various special functions used are also given. Orig. art. has: 32 formulas, 5 tables, and 8 figures.

SUB CODE: 20,12 / SUBM DATE: 05Sep65 / ORIG REF: 003

kh

Card 2/2

ACCESSION: 001(1)/001 001 (N) SOURCE CODE: UR/0362/66/002/008/0851/0858

AUTHOR: Shifrin, K. S.; Kolmakov, I. B.

ORG: Main Geophysical Observatory (Glavnaya geofizicheskaya observatoriya)

TITLE: Influence of limitation of the indicatrix measurement interval on the accuracy of the small-angle method

SOURCE: AN SSSR. Investiya. Fizika atmosfery i okeana, v. 2, no. 8, 1966, 851-858

TOPIC TAGS: Light dispersion, light scattering, atmosphere cloud, fog, particle distribution

ABSTRACT: This is a continuation of earlier work (Tr. GGO, no. 152, 1964 and preceding papers) dealing with the determination of the particle spectrum of a disperse system, such as a natural cloud or fog, from data on its light scattering, and is devoted to the accuracy with which the spectrum can be reconstructed by means of inversion of the scattering pattern by the small-angle method. The authors first analyze the direct problem of determining the optical information necessary to describe scattering from a system of particles with a γ distribution. A formula is derived which makes it possible to estimate the contributions of the small and large particles to the total distribution of the light. A series of numerical calculations with this formula shows that when the small-droplet fraction is eliminated from the spectrum, the entire scattering pattern contracts to the ordinate axis, and when the large-droplet fraction is disregarded, the pattern becomes distorted, and the pattern acquires an oscillatory

UDC: 551.521.3: 535.361

Card 1/2

ACC NR: AR6030084

character. The inverse problem is then considered and it is shown theoretically that if the optical measurements include a certain fundamental angle interval, then the spectrum can be reconstructed with a sufficient degree of accuracy. This angle interval depends on the requirements imposed on the particle-size distribution function and on the specified particle-size interval. Orig. art. has: 4 figures and 22 formulas.

SUB CODE: 20/04/ SUBM DATE: 12Mar66/ ORIG REF: 006/ OTH REF: 001

Card 2/2

L 31497-66 EWT(1)/T IJP(c)
ACC NR: AP6013026

SOURCE CODE: UR/0051/66/020/004/0692/0700

AUTHOR: Shifrin, K. S.; Perel'man, A. Ya.; Bakhtiyarov, V. G.

48
3

ORG: none

TITLE: Determination of the ²spectra of particles of a disperse system from data on its transparency. VI. Experimental verification of the method by means of models

SOURCE: Optika i spektroskopiya, v. 20, no. 4, 1966, 692-700

TOPIC TAGS: spectral distribution, optic transmission, particle spectrum, optic dispersion

ABSTRACT: The first five parts of the article (Opt. i spektr. v. 15, 533, 667, 803, 1963; v. 16, 117, 1964; v. 20, 143, 1966) dealt with a theoretical method for determining the spectrum of particles in a disperse system by determining the spectral transparency, and contained formulas derived on the basis of certain assumptions and theoretical models. The present article discusses the difficulties which arise in experimentally checking this method and describes experiments made on several two-dimensional models of turbid media. These were either spores of fungi Calvatia, on a dry plate made of KRS-5, or dispersed single crystals of AgBr

Card 1/2

UDC: 541.182 + 535.345.1.001.1

L 31497-66

ACC NR: AP6013026

in gelatin, placed on a quartz plate. The spectral transparency was measured with standard instruments in the 0.24-1.1 and 2-25 mm ranges. The distribution of the dimensions of the spores or the AgBr were measured with an electron microscope and the size distribution was determined microphotographically by a sampling technique, since the plane model did not fit the field of view of the electron microscope. The spectra obtained with the electron microscope and by the transparency method were found to be in satisfactory agreement. Orig. art. has: 6 figures and 13 formulas.

SUB CODE: 20/ SUBM DATE: 24Oct64/ ORIG REF: 010/ OTH REF: 001

Card 2/2 mc

SOURCE CODE: UR/0362/66/002/006/0606/0616

ACC NR: AP0022219

AUTHOR: Perel'man, A. Ya.; Shifrin, K. S.

ORG: Main geophysical observatory (Glavnaya geofizicheskaya observatoriya)

TITLE: Calculation of optical characteristics of dispersive systems with a narrow distribution

SOURCE: AN SSSR. Izvestiya. Fizika atmosfery i okeana, v. 2, no. 6, 1966, 606-616

TOPIC TAGS: light scattering, atmospheric optics, aerosol, aerosol optical property

ABSTRACT: The authors have chosen a family of gamma function distributions as a model for individual particle light dispersive characteristics. With the help of this model and a modified stationary phase method, a general asymptotic formula has been developed, representing the structure of the dispersed radiation field in the case of narrow dispersive systems. The range of validity and practical applicability of the obtained formula has been evaluated. The formula has been used for the computation of polydispersed optical characteristics pertinent to the methods of transparency, the scattering function and small angles. The results show the oscillating nature of the optical characteristics in the case of almost monodispersive systems. Orig. art. has 63 formulas.

SUB CODE: 13, 20/

SUBM DATE: 25Dec65/

ORIG REF: 006/

OTH REF: 001

UDC 551.593.5

Card 1/1

ACC NR: AP7010687

radiation field and the quantity of heat which a drop releases into surrounding space by the heat conductivity of evaporation and thermal radiation. The authors present formulas and curves which make it possible to compute the kinetics of evaporation of any drop with an initial radius from 1 mm to 1 μ m. As an example of the use of the curves, the authors show the change of the drop spectrum of a polydisperse cloud in the field of solar radiation. At the initial time the drops were distributed in conformity to the law $\Lambda a^2 e^{-\beta a}$ with a mode equal to 5 μ m. Since the large drops evaporate more rapidly than the small drops, the spectrum narrows with time and the distribution is deformed. A half-hour after the onset of the process the modal radius will be about 1.5 μ m (3 μ m), the liquid water content decreases by 4.4 times (2.5 times), and after an hour the distribution becomes amodal (mode of about 1 μ m), the liquid water content will be 20 times (10 times) less. Orig. art. has: 5 figures and 12 formulas.
/JPRS: 40,291/

Card 2/2

SHITRIN, Kh. V.

"Electrolysis in the Case of Successiv Passage of Current through Gaseous and Liquid Phases: I. Formation of Hydrogen Peroxide upon Discharge through Hydrogen, Oxygen, Nitrogen and Water," Iz. Ak. Nauk SSSR, Otdel. Khim. Nauk, No. 5, 1944; Kazan' Chemical Technological Institute, The Chair of Physics, -1944-.

177

ON THE THEORY OF ELECTRIC PROPERTIES OF GOOD CONDUCTING SEMI-CONDUCTORS.
K. Shifrin (*J. Physics (U.S.S.R.)*, 1944, 8, (4), 242-252).—[In English.]
Theoretical. Expressions are derived for the relationship between concentration of free electrons and concentration of impurity atoms in semi-conductors of the "impurity metal" type, and for the dependence of the number of free electrons on temperature. The electrical conductivity of semi-conductors with both atomic and ionic lattices is considered, and thermoelectric effects are dealt with.—G. V. R.

SHIFRIN, Kh.V.

On certain regularities in the D.I. Mendeleev periodic system. Elements of the theory of numbers applied to the D.I. Mendeleev periodic system. Report No.1. Trudy KKHTI no.21:37-64 '56. (MIRA 12:11)
(Periodic law)

VINOGRADOV, A.P.; ALIMARIN, I.P.; KLYACHKO, Yu.A.; RYABCHIKOV, D.I.;
HUDNEV, N.A.; HUDENKO, N.P.; TOROPOVA, V.F.; SHIFRIN, Kh.V.

Aleksei Mikhailovich Vasil'ev. Zav.lab. 22 no.7:887 '56. (MIRA 9:12)
(Vasil'ev, Aleksei Mikhailovich, 1882-1956)

MOCHALOV, K.N.; SHIFRIN, Kh.V.; BOGONOSTSEV, A.S.

Boron hydrides, new reagents in analytical chemistry. Report
No.1. Trudy KKHTI no.26:135-139 '59. (MIRA 15:5)

1. Kafedra analiticheskoy khimii Kazanskogo khimiko-tekhnologicheskogo instituta imeni S.M.Kirova.
(Boron hydrides) (Chemistry, Analytical)

MOCHALOV, K.N.; BOGONOSTSEV, A.S.; SHIFRIN, Kh.V.; Prinsipala uchastiye:
GOLUBEVA, V.G.

Boron hydrides, new reagents in analytical chemistry. Report
No.3: Boron hydride method for determining iron. Trudy KKHTI
no.26:145-150 '59. (MIRA 15:5)

1. Kafedra analiticheskoy khimii Kazanskogo khimiko-tekhnologicheskogo
instituta imeni S.M.Kirova.
(Iron--Analysis) (Boron hydrides)

MOCHALOV, K.N.; BOGONOSTSEV, A.S.; SHIFRIN, Kh.V.

Boron hydrides, new reagents in analytical chemistry. Report No.2:
Production of pure sodium and potassium boron hydrides. Trudy
KKHTI no.26:140-144 '59. (MIRA 15:5)

1. Kafedra analiticheskoy khimii Kazanskogo khimiko-tekhnologicheskogo
instituta imeni S.M.Kirova.
(Boron hydrides) (Chemistry, Analytical)

MOCHALOV, K.N.; SHIFRIN, Kh.V.; BOGNOSTSEV, A.S.

Hydrolysis of sodium borohydride. Zhur. fiz. khim. 37 no.11:
2404-2407 N'63. (MIRA 17:2)

1. Kazanskiy khimiko-tekhnologicheskiy institut.

ACCESSION NR: AP4016520

S/0195/64/005/001/0174/0177

AUTHOR: Mochalov, K. N.; Shifrin, Kh. V.; Bogonostsev, A. S.

TITLE: Kinetics of potassium borohydride hydrolysis

SOURCE: Kinetika i kataliz, v. 5, no. 1, 1964, 174-177

TOPIC TAGS: potassium borohydride, sodium borohydride, lithium borohydride, cesium borohydride, alkali borohydride hydrolysis

ABSTRACT: The present work was prompted by the absence of data on KBH_4 which is a much later discovered product than NaBH_4 , but less known, although it is now industrially produced in the U.S.A. A study of KBH_4 and NaBH_4 hydrolysis in buffer borate solutions (as well as of LiBH_4 and CsBH_4) carried out by G. G. Gil'manshin in the laboratory of the Kazanskiy khimiko-tekhnologicheskii institut (Kazan' Chemical-Engineering Institute) showed that this reaction is practically independent of the cation action. Due to the proportionality of the reaction rate of the borohydride ion and the H^+ ion, it follows that an intermediate complex is formed (BH_4^-). Its

Card 1/2

ACCESSION NR: AP4016520

destruction may lead to borine $BH_3 + H_2$ which combines with water into $BH_2(OH)$ and $BH(OH)_2$ and with OH^- into hypoborates. Finally, in a strongly acidic medium, borine dimerizes with liberation of diborane B_2H_6 . The complex character of hydrolysis was proven by polarographic studies made by Gil'Manshin and by a chromatographic study made by V. S. Khain. $LiBH_4$ has the greatest reducing capacity. However, the polarizing action of cations is leveled in an aqueous medium, explaining the same interaction rate of different alkali borohydrides with water. Orig. art. has: 2 figures, 12 formulas and 2 tables.

ASSOCIATION: Kazanskiy khimiko-tekhnologicheskii institut (Kazan Chemical-Engineering Institute)

SUBMITTED: 17Jul 62

DATE ACQ: 18Mar64

ENCL: 00

SUB CODE: CH

NO REF SOV: 005

OTHER: 008

Card 2/2

BORISOV, A.; BIRGER, G.; VOLKOV, A.; DICH, S.; DUSEYEVA, Ye.; KONKIN, A.A.;
MEOS, A.; MIKHAYLOV, N.; MOGILEVSKIY, Ye.; POKSHVER, A.;
ROGOVIN, Z.; SERKOV, A.; SHIFRIN, L.

On the 60th birthday of an honored worker. Khim.volok. no.2:79
'62. (MIRA 15:4)

(Gruzdev, Vasilii Alekseevich, 1902-)

AGRANOVSKIY, I.; ARANOVICH, B.; BELYAYEVA, V.; BOL'SHAKOV, A.; GRUZDEV,
V.; DICH, S.; ZELENTSOV, I.; KONKIN, A.; LEVIT, R.; MIKHAYLOV,
N.; MOGILEVSKIY, Ye.; SERKOV, A.; SMELKOV, G.; SNETKOV, N.;
SOROKIN, Ya.; SHIFRIN, L.

In memory of Vladimir Sergeevich Smurov, 1897-1965. Khim.
volok. no.2:78 '65. (MIRA 18:6)

SHIFRIN, L., kapitan 3 ranga

Supplement to the "Pal'ma" map-reading attachment and its use
in navigation. Mor.flot 19 no.4:30-33 Ap '59.

(MIRA 12:6)

(Aids to navigation)

SHIFRIN, L., kapitan 2 ranga

Radar method of determining the speed of ships and lag corrections.

Mor. flot 23 no.3:22-25 Mr. '63.

(MIRA 16:3)

(Radar in navigation)

BELKIN, A.; BORISOV, A.; GENIN, B.; GUSLITSER, I.; GRUZDEV, V.; DICH, S.;
DUSEYEVA, Ye.; YEGOROVA, A.; ZAK, S.; KAZIMOV, A.; KRUPENNIKOVA, Ye.;
KONKIN, A.; MOGILEVSKIY, Ye.; PAKSHVER, A.; SMELKOV, G.;
CHICHKHLANI, A.; CHUGUNOV, K.; SHIFRIN, L.; YUNOVICH, E.

Sergei Alekseevich Tairov. Khim.volok. no.3:79 '62,
(MIRA 16:2)

(Tairov, Sergei Alekseevich)

SHIFRIN, I.A.

Tat'iana Fedorovna Abrosimova. Med. sestra 19 no.1:41-42 Ja '60.
(MIRA 13:5)

1. Iz Volzhskoy poselkovoy bol'nitsy Nekouzskogo rayona Yaroslavskoy
oblasti.

(ABROSIMOVA, TAT'IANA FEDOROVNA, 1899-)

SHIFRIN, L.A.

Case of penetrating heart wound. Sov.med. 21 Supplement:21 '57.
(MIRA 11:2)

1. Iz Volzhskoy poselkovoy bol'nitsy Yaroslavskoy oblasti.
(HEART--WOUNDS AND INJURIES)

SHIFRIN, L.A.

Two cases of wounds of the heart. Khirurgiia 36 no.3:121-122
Mr '60. (MIRA 13:12)

(HEART—WOUNDS AND INJURIES)

SHIFRIN, L.A.

Two cases of extensive resection of the small intestine. Nov. khir.
arkh. no.3:86-88 My-Je '60. (MIRA 15:2)

1. Volzhskaya poselkovaya bol'nitsa Nekouzskogo rayona, Yaroslavskoy
oblasti. Adres avtora: st. Volga, Severnoy zheleznoy dorogi,
Volzhskaya poselkovaya bol'nitsa.
(INTESTINES__SURGERY)

ZARITSKIY, V.K., inzh.; KNYASHINSKIY, Z.G., kand. tekhn. nauk; RAYCHUK,
Yu.I., inzh.; SHIFRIN, L.M., inzh.

Calculation of efficient parameters of the sizing instrument on
expansion presses. Proizv. trub no.12:57-63 '64.

(MIRA 17:11)

L 42976-66 EWT(d)/EWT(m)/EWP(k)/EWP(h)/T/EWA(d)/EWP(v)/EWP(t)/EWP(l) WB/

ACC NR: AT5022784
HW/HM/JD

SOURCE CODE: UR/3164/64/000/014/0052/0055

AUTHOR: Knyazhinskiy, Z. O. (Candidate of Technical Sciences); Kalinushkin, P. N. (Engr.) ; Shifrin, L. M. (Engr.); Atamanenko, V. A. (Engr.)

28
21
B+1

ORG: Institute of Electric Welding im. Paton (Institut elektrosvarki); Volgograd Scientific Research Institute of Machine-Construction Technology (Volgogradskiy nauchno-issledovatel'skiy institut tekhnologii mashinostroyeniya)

TITLE: Welded large diameter two-layer pipes

SOURCE: Dnepropetrovsk. Vsesoyuznyy nauchno-issledovatel'skiy i konstruk-torsko - tekhnologicheskii institut trubnoy promyshlennosti. Proizvodst-vo trub, no. 14, 1964. Sbornik statey po teorii i praktike trubnogo proiz-vodstva (Collection of articles on the theory and practice of pipe production), 52-55

TOFIG TAGS: production engineering, pipe, corrosion resistance, stainless steel, carbon steel

Card 1/3

L 42976-66

ACC NR: AT5022784

6

ABSTRACT: The difficulty in obtaining special noncorrosive steel, because of its scarcity, in order to produce large-diameter pipes for use in plants producing corrosive materials at high temperatures and pressures makes it necessary to find a way towards a more economic use of such steel. It is recommended that a pipe be produced from two welded sheets of steel, with the inner surface of the pipe made from a high-alloy and corrosion-resistant steel and the outer surface from carbon or low-alloy steel. As a result of experiments a technological process was developed which consisted of taking two or three sheets of steel and welding them together in a plate, which in turn was formed into a hollow ingot and, after welding, shaped as a pipe. In addition to the welding of plates and pipes the method provided for carbon (or low-alloy) steel and stainless steel seams to give the necessary resistance to intercrystalline corrosion. The lengthwise edges of the plates were prebent in order to get a better regular cylindric shape of the ingots. The shaping of plates into hollow ingots was carried out on plate-bending rollers with the use of a template. The welding of pipes was accomplished by the usual method with small modifications. The pipes were cold-straightened on a four-roller plant. It was possible by this method to produce high-quality welded two-layer pipes having a diameter of 630-1020 mm. Orig. art. has: 3 figures and 2 tables.

Card 2/3

L 42976-66

ACC NR: AT5022784

SUB CODE: 11,13 SUBM DATE: none/

clad steel 18

Card 3/3 hs

LINDORF, L.S.; SHIFRIN, L.N.

Increase in the operational reliability of the converter devices
of electrolysis systems with automatic reclosing and short-circuits
in the network. Prom. energ. 15 no.8:17-20 Ag '60. (MIRA 15:1)
(Electrometallurgy--Electric equipment)

5.11.11.25.
MOROZOV, A.P.; MININ, V.F., inzh.; SHIFRIN, L.S., inzh.; STAROV, A.F., inzh.;
PUGACH, Ya.Yu., inzh.

Thin-slab reinforced cement roofs in housing construction. Biul. tekhn.
inform. 3 no.11:3-6 N '57. (MIRA 11:1)

1. Deystvitel'nyy chlen Akademii stroitel'stva i arkhitektury (for
Morozov). (Roofs, Concrete)

SHIFRIN
MOROZOV, A.P.; MININ, V.F., inzh.; STAROV, A.F., inzh.; SHIFRIN, L.S., inzh.

First experience of using reinforced cement for roofs in civil construction. Biul. tekhn. inform. 3 no.12:13-17 D '57. (MIRA 11:1)

1. Deystvitel'nyy chlen Akademii stroitel'stva i arkhitektury (for Morozov).
(Roofs, Concrete)

YESHCHENKO, D.D., inzh.; STAROV, A.F., inzh.; SHIFRIN, L.S., inzh.

Vibrated brick panels for apartment houses. Biul.tekh.inform.
po stroi. 5 no.11:7-8 N '59. (MIRA 13:4)
(Leningrad--Building blocks)

SHIFRIN, Lev Solomonovich; CHERNOKAL'TSEV, Yu.L., inzh., spetared.; DENISOV, K.N., red.izd-va; DROZHZHINA, L.P., tekhn.red.

[Use of the "Pal'ma" chart matching device in navigation]
Ispol'zovanie kartoslichitel'noi pristavki "Pal'ma" v sudo-
vozhdenii. Leningrad, Izd-vo "Morskoi transport," 1960. (MIRA 13:4)
66 p.
(Radar in navigation) (Electronics in navigation)

KLEMANOV, Yu., inzhener.; ~~SHIFRIN, M., inzhener.~~

New stands for testing automobile units. Avt.transp. 34 no.4:
21-23 Ap '56. (MLRA 9:8)

(Automobiles--Engines--Testing)

SHIFRIN, M.; SKACHKOV, A.

Automatic boiler plant control system on the whaler "Slava."

Mor. flot 18 no.1:12-15 Ja '58.

(MIRA 1F:1)

1. Nachal'nik otдела Vsesoyuznogo Tsentral'nogo nauchno-issledovatel'skogo instituta imeni akademika A.N. Krylova (for Shifrin).
(Boilers, Marine) (Automatic control)

L 39049-66

ACC NR: AP6021981

(N)

SOURCE CODE: UR/0308/66/000/003/0031/0032

AUTHOR: Shifrin, M. (Professor)

ORG: None

TITLE: Raising the operational efficiency of marine equipment

SOURCE: Morskoy flot, no. 3, 1966, 31-32

TOPIC TAGS: marine equipment, remote control system, servicing technique, naval training

ABSTRACT: The author makes comments on the article by A. Val'ter which was published in this journal No. 4, 1965. Mr. Val'ter correctly pointed out the shortcomings in marine service crews and marine upkeep services. The author of the present article cites additional sources of error and inefficiency. One of the main criticisms is the use of the period between repairs as an index of efficiency. The author proposes periodic inspection of automatic and remote control equipment along with engines etc. If periods between repairs are used as the index, there is absolutely no way of telling how well the equipment was serviced and whether failure of equipment was due to total lack of service as has been the case in the past. The author proposes that qualified crews be trained specifically for servicing equipment under their care and that reports on the condition of equipment be submitted to several agencies including the plant

UDC: 629.128.004.17

Card 1/2

L 39042-66

ACC NR: AP6021981

which manufactured the equipment. It is pointed out that spare parts and qualified personnel for installing them are not available on most ships. Repair work and servicing can be combined with docking if preliminary organizational steps are taken. The organization of spare parts distribution, training of qualified personnel in the theory and practice of equipment handling, the availability of consultants from plants issuing the equipment, standardization whenever possible and other measures for improving operating efficiency and economy of automated and remote control marine equipment should eliminate existing problems.

SUB CODE: 13, 14/ SUBM DATE: none

Card 2/21/28

SHIFRIN, M.A.

KONOROV, A.V.; SEMENSOV, S.A.; SHIFRIN, M.A.

[Simplified methods for building material testing] Uprosh-
chennye sposoby ispytaniia stroitel'nykh materialov. Moskva,
Gos.izd-vo stroit.lit-ry, 1946. 71 p. (MIRA 8:2)
(Building materials--Testing)

SHIFRIN, M. A.

"Construction of the Insulation of Nonmetal Reservoirs for
Corrosive Medium." Sub 10 Jun 47, Central Sci Res Inst of Industrial
Structures (TsNIPS) *Cand Tech Sci*

Dissertations presented for degrees in science and engineering in
Moscow in 1947.

SO: Sum. No. 457, 18 Apr 55

SHIFRIN, M.A., kand. tekhn. nauk; MALINA, F.N., inzh.

Industrial methods of making and erecting partitions. Biul.
stroit. tekhn. 12 no. 10:10-12 0 '55. (MIRA 12:1)
(Walls) (Gypsum) (Slag)

SOV/112-57-5-10644

18 (3)

Translation from: Referativnyy zhurnal. Elektrotehnika, 1957, Nr 5,
pp 155-156 (USSR)

AUTHOR: Shifrin, M. A., Gorodinskiy, I. A.

TITLE: Automatic Monitoring of the Thickness of Hot-Rolled Sheets
(Avtomaticheskiy kontrol' tolshchiny goryachego tonkolistovogo prokata)

PERIODICAL: Byul. Tsentr. in-t inform. chernoy metallurgii, 1956, Nr 4,
pp 55-61

ABSTRACT: An automatic outfit is described for measuring hot-rolled 2-10 mm sheets by the compensation method, with an error under 0.02-0.03 mm; the outfit has been developed by the Central Automation Laboratory, the Ministry of Ferrous Metallurgy (TsLA MChM), and depends on x-ray pulses for its operation. The outfit comprises: an x-ray tube, two photomultipliers with luminescent screens, a supply-and-control desk, and an electronic BP-102 potentiometer. A pulse modulator produces 0.0001-sec pulses with a

Card 1/2

SOV/112-57-5-10644

Automatic Monitoring of the Thickness of Hot-Rolled Sheets

repetition frequency of 50 cps. The x-ray tube voltage is 100 kv, current 0.1 amp. The average power is about 40 va as compared to 3.2 kva needed for continuous radiation. The service life of the x-ray tube is 3,000-4,000 hours. Reported are: calculation of generating conditions, analysis of measurement errors due to hot sheet, calculation of water sprinkling on the sheet and warping of same; measures to eliminate the errors are indicated. A general block diagram, pulse-modulator circuit, records and graphs obtained are presented.

V.F.R.

Card 2/2

BERDICHEVSKIY, G.I., kand.tekhn.nauk; DMITRIYEV, S.A., kand.tekhn.nauk;
MIKHAYLOV, K.V., kand.tekhn.nauk; GVOZDEV, A.A., prof., doktor
tekhn.nauk; MIKHAYLOV, V.V., prof., doktor tekhn.nauk; BULGAKOV,
V.S., kand.tekhn.nauk; VASIL'YEV, A.P., kand.tekhn.nauk; YEVGEN'YEV,
I.Ye., kand.tekhn.nauk; MULIN, N.M., kand.tekhn.nauk; SVETOV, A.A.,
kand.tekhn.nauk; FRENKEL', I.M., kand.tekhn.nauk; BELOBROV, I.K.,
inzh.; MATKOV, N.G., inzh.; MITNIK, G.S., inzh.; SKLYAR, B.L., inzh.;
SHILOV, Ye.V., inzh.; MASENKO, I.D., inzh.; NIZHNIHENKO, I.P., inzh.;
FILIPPOVA, G.P., inzh.; MIZERNYUK, B.N., kand.tekhn.nauk; SHEYNFEL'D,
N.M., kand.tekhn.nauk; BALAT'YEV, P.K., kand.tekhn.nauk; BARBARASH,
I.P., kand.tekhn.nauk; MITGARTS, L.B., kand.tekhn.nauk; SHIFRIN, M.A.,
kand.tekhn.nauk; PETROVA, V.V., red.izd-va; TEMKINA, Ye.L., tekhn.red.

[Temporary instruction on the technology of making prestressed re-
inforced concrete construction elements] Vremennaya instruktسيا po
tekhnologii izgotovleniya predvaritel'no napriazhennykh zhelezob-
tonnykh konstruktсий. Moskva, Gos.izd-vo lit-ry po stroit., arkh. i
stroit.materialam, 1959. 255 p. (MIRA 12:12)

(Continued on next card)

BERDICHEVSKIY, G.I.---(continued) Card 2.

1. Akademiya stroitel'stva i arkhitektury SSSR. Institut betona i zhelezobetona, Perovo. 2. Nauchno-issledovatel'skiy institut betona i zhelezobetona Akademii stroitel'stva i arkhitektury SSSR (for Gvozdev, V.V.Mikhaylov, Berdichevskiy, Bulgakov, Vasil'yev, Dmitriyev, Yevgen'yev, K.V.Mikhaylov, Mulin, Svetov, Frenkel', Belobrov, Matkov, Mitnik, Sklyar, Shilov). 3. Nauchno-issledovatel'skiy institut organizatsii, mekhanizatsii i tekhpomoshchi Akademii stroitel'stva i arkhitektury SSSR (for Masenko, Nizhnichenko, Filippova, Mizernyuk, Sheynfel'd). 4. Nauchno-issledovatel'skiy institut Glavmosprometroymaterialov (for Balat'yev, Barbarash). 5. Nauchno-issledovatel'skiy institut po stroitel'stvu Minstroya RSFSR (for Mitgarts, Shifrin). 6. Deyatvitel'nyye chleny Akademii stroitel'stva i arkhitektury SSSR (for Gvozdev, V.V.Mikhaylov).
(Prestressed concrete)

ABEZGAUZ, V.D., inzh.; LIVSHITS, L.S.; SHIFRIN, M.A., kand.tekhn.nauk

Operating and improving the SM-535 stand. Stroi.i dor.mashinostr.
no.7:32-36 J1 '59. (MIRA 12:11)
(Prestressed concrete construction)

SHIFRIN, M.A., kand. tekhn. nauk

Technology of making wire-reinforced concrete products on the
SM-535 stand. Nov. tekhn. mont. i spets. rab. v stroi. 21:15-18
Je '59. (MIRA 12:8)

1. Nauchno-issledovatel'skiy institut stroitel'noy promyshlennosti
Minstroya RSFSR.
(Reinforced concrete)

SHIFRIN, M.A. - kand.tekhn.nauk

New methods for fixing cable ends. Mont. i spets, rab. v stroi.
22 no.5:27-28 My'60. (MIRA 13:10)

1. Nauchno-issledovatel'skiy institut stroitel'noy promyshlennosti.
(Cables)

SHIFRIN, M.A., kand.tekhn.nauk (g.Moskva); SHAPOVALOV, I.S., inzh.;
KUROCHKIN, M.; YERSHOV, A.V., starshiy nauchnyy sotrudnik;
SHEVEL'KOV, V.L., prof., doktor tekhn.nauk

Heat engineering standards and regulations in construction
should be revised. Inzh.-fiz. zhur. 4 no.9:120-126 S '61.
(MIRA 14:8)

1. Issledovatel'skiy institut eksperimental'nogo proyektirovaniya Akademii stroitel'stva i arkhitektury SSSR (for Shapovalov). 2. Tsentral'nyy institut nauchnoy informatsii po stroitel'stvu i arkhitekture Akademii stroitel'stva i arkhitektury SSSR (for Kurochkin). 3. Nauchno-issledovatel'skiy institut po stroitel'stvu Akademii stroitel'stva i arkhitektury SSSR, g. Tashkent (for Yershov). 4. MKhTIP (for Shevel'kov).

(Building laws) (Heat engineering)

KOLODZIY, I.I., inzh.; SHIFRIN, M.A., kand.tekhn.nauk

New rack-type holders for piling stands. Stroi.i dor.mash. 6
no.4:26-27 Ap '61. (MIRA 14:3)
(Prestressed concrete construction—Equipment and supplies)

SHIFRIN, M.A., kand.tekhn.nauk; RUF, L.V., inzh.

Use of strand reinforcement in prestressed concrete products.
Prom.stroi. 40 no.8:46-50 '62. (MIRA 15:11)
(Concrete reinforcement) (Prestressed concrete)

VASILEVSKIY, M.E., prof.; SHIFRIN, M.A.

Hyperinsulinism. Vrach. delo no.10:72-76 0 '63.
(MIRA 17:2)

1. Kafedra gospi'tal'noy terapii (zav. - prof. M.E.
Vasilevskiy) Yaroslavskogo meditsinskogo instituta.

SHIFRIN, M. A.

Blood serum proteins in diabetes mellitus. Probl. endok. i gorm.
8 no.3:88-93 My-Je '62. (MIRA 15:6)

1. Iz kafedry gospiatal'noy terapii (zav. - prof. M. E. Vasilevskiy)
Yaroslavskogo meditsinskogo instituta.

(DIABETES) (BLOOD PROTEINS)

ABRAMOV, S.A., inzh.; ALIFANOV, I.N., inzh.; KARPOV, A.F., inzh.;
KOROTKOV, A.P., inzh.; KOLOSOV, B.P., inzh.; KUZNETSOV,
V.S., inzh.; NIKONOV, G.V., inzh.; REPIN, M.I., inzh.;
SEMENYUCHENKO, G.P., inzh.; SLOBODSKOY, L.M., inzh.;
TSUKANOV, Ye.V., inzh.; SHIFRIN, M.G., inzh.; BOL'SHAKOV,
A.S., inzh., retsenzent; KISELEVA, N.P., inzh., red.;
USENKO, L.A., tekhn. red.

[11D45 diesel locomotive] Teplovoznii dizel' 11D45. Moskva,
Transzheldorizdat, 1963. 95 p. (MIRA 16:7)
(Diesel locomotives)

ZHILIN, G.A.; MALINOV, M.S.; RODOV, A.M.; SULIMTSEV, I.I.; SHIFRIN,
M.G.; KISELEVA, N.P., inzh., red.; IL'IN, B.M., tekhn. red.

[TEP60 diesel locomotive for passenger trains] Passazhirskii
teplovoz TEP60. Moskva, Transzheldorizdat, 1963. 222 p.
(MIRA 16:9)

(Diesel locomotives)

ca

12

Rapid determination of ash in coal. T. A. Zikeev and M. G. Shil'min. *Zavodskaya Lab.* 5, 202 4(1938).—It is shown that equally rapid and accurate results are obtained by the method of gradual incineration (Aronov and Trigerman, *C. A.* 29, 1905*) when the wetting of sample with acids is omitted. Chas. Blanc

ASH-51A METALLURGICAL LITERATURE CLASSIFICATION

83201 830479

83201 830479

6A 21

Determination of sulfur in coal. M. G. Shifrin.
Zavodskaya Lab. S, 824-8(1936). --Brubns method is
recommended. H. C. A.

ASR SLA DETAILINGKAL LITERATURE CLASSIFICATION

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50

PROCESS AND PROPERTIES INDEX																									
1ST AND 2ND ORDERS													3RD AND 4TH ORDERS												
<p>Testing of Perederi's method of determining total sulfur in coal and coke. M. G. Shufin, <i>Zhurnal Khim. 6</i>, 910-11(1937); cf. Perederi, <i>C. A.</i> 30, 2729^h.—The method does not give satisfactory results. B. C. P. A.</p>																									
<p>ASB-SLA METALLURGICAL LITERATURE CLASSIFICATION</p>																									
<p>1ST AND 2ND ORDERS</p>																									
<p>3RD AND 4TH ORDERS</p>																									

7

CA

Solutions of chromous chloride as oxygen absorbents in gas analysis. T. A. Zikreev and M. G. Shifrin, *Zhurnal Khim. Fiz.* 13, 1130-3(1947).—In general concn. solns. of CrCl_2 are more stable than are dil. solns. Amalgamated Zn is preferable to Zn in reducing CrCl_2 soln. Study of performance made in a precision app., in which air was passed through the reagent and then through pyrogallol, showed that the fresh reagent fails to absorb about 0.14% of the O present; this value increases as the reagent is used. Fresh solns. can be used for O analyses which do not require high precision. The effectiveness is unaffected by temp. between 5° and 50°. G. M. Kosolapoff

ASB 55A METALLURGICAL LITERATURE CLASSIFICATION

1ST AND 2ND ORDERS										3RD AND 4TH ORDERS									
PROCESSES AND PROPERTIES INDEX																			
S										21									
<p>DETERMINATION OF TOTAL SULPHUR IN HEAVY OIL PRODUCTS.</p> <p>T. A. Zikeev and M. G. Shifrin. (Zavodskaya laboratoriya, 1949, vol. 15, Feb., pp. 157-158). (In Russian). Combustion with a mixture of manganese dioxide and soda in the ratio of 2:1 was found to be satisfactory for the determination of total sulphur in liquid heavy-petroleum products containing about 0.2-4% of this element, the results obtained agreeing well with those from bomb combustions. S. A.</p>																			
ASM-SLA METALLURGICAL LITERATURE CLASSIFICATION																			
SIGNATURE										SIGNATURE									
DATE										DATE									

Shifrin, M.G.

198. APPLICATION OF THE ACCELERATED METHOD OF FEDOSEEV AND FAVLENO FOR THE DETERMINATION OF CARBON AND HYDROGEN TO SOLID FUELS. Zil'ber, T.A. and Shifrin, M.G. (Izv. Vsesoyuz. Teplotekhn. Inst. (Kull. AII-Un. For Engng Inst., Moscow), 1952, vol. 21, (12), 24-27; abstr. in Chem. Abstr., 1956, vol. 50, 5729). The method was found applicable to solid fuels, but with great an intense combustion was observed. The substitution of cupric oxide for chromic oxide resulted in smooth combustion and gave equally good results. C.A.W.

SHIFRIN, M.G.; KURGATNIKOV, V.M.

New development of organization in the cutting-out department of the
"Skorokhod" factory. Leg.prom. 15 no.10:8-13 0 '55. (MLRA 9:1)
(Shoe industry)

ZIKHEYEV, T.A., kandidat tekhnicheskikh nauk; SHIFRIN, M.G., inzhener.

Determination of unburned carbon in hearth shale residues.
Elek.sta. 27 no.1:11-13 '56. (MLRA 9:6)
(Combustion)

L 8159-66 EPP(n)-2/T-2/ETC(m)/EWP(f) WW

ACC NR: AP5025065

SOURCE CODE: UR/0286/65/000/016/0116/0116

AUTHORS: Morgulis, P. S.; Vasil'chenko, P. A.; Shifrin, M. G.; Repin, M. I. B
51

ORG: none

TITLE: Method of increasing pick-up (acceleration) of diesel generators with gas turbine superchargers. Class 46, No. 174039

SOURCE: Byulleten' izobreteniy i tovarnykh znakov, no. 16, 1965, 116

TOPIC TAGS: engine governor, supercharger, gas turbine, diesel engine

ABSTRACT: This Author Certificate presents a method for improving the pick-up of diesel generators with gas turbine superchargers by controlling the supply of exhaust gases to the turbine. To permit load variations without change in engine speed, the step-wise changes of turbine partiality (partial admission) are accomplished by supplying exhaust gases from one or several collectors to the turbine. The control is provided by a gas distributing valve which is activated according to engine load.

SUB CODE: PR/ SUBM DATE: 01Jun64

JW

Card 1/1

UDC: 621.436

1. The first part of the report is a summary of the

information received from the source. The second part is a

(11/25/77)

1ST AND 3RD ORDERS																										2ND AND 4TH ORDERS																									
PROCESSES AND PROPERTIES INDEX																																																			
<div style="display: flex; justify-content: space-between;"> F M </div> <p>1090. ASKANIA AUTOMATIC FEED REGULATORS FOR MARINE BOILERS. Shifrin, M. S. (Sudostroyenie, Nov./Dec. 1946, 16, (6), 7-10; Engng Abstr., Sept. 1947, 10, (8), 86). The paper describes the construction and principle of operation of the "Askania" automatic system of feed regulation for high-capacity marine watertube boilers. Sectional drawings are given of the dual-impulse feed regulator, metering device and jet relay, the working medium for the latter being lubricating oil under pressure. The feed-water supply to the boiler is controlled both by the rate of evaporation (steam demand) and the height of the water level in the steam drum. The feed regulator contains two separate diaphragms, one of which reacts to changes in the rate of evaporation and the other to alterations of the water level in the boiler. The theory of the regulating action of the unit is discussed.</p>																																																			
<div style="display: flex; justify-content: space-between;"> <div> <p>COMMON ELEMENTS</p> <p>OPEN</p> <p>MATERIALS INDEX</p> </div> <div> <p>ASB-5LA METALLURGICAL LITERATURE CLASSIFICATION</p> <p>REGION 17/18/19/20</p> </div> <div> <p>REGION 21/22/23/24</p> <p>REGION 25/26/27/28</p> </div> </div>																																																			

SHIFRIN, M. Sh.

"Multi-Impulse Regulation of Electrical Apparatus" Tr. Leningr. Korablestroit,
In-ta, No 12, 1954, 135-143

The author presents a brief account of the concepts and terminology of the classical theory of automatic regulation. He presents the basic schemes of the regulation of steam turbines (of direct and indirect action, with rigid and flexible reverse connections, with subsidiary regulation according ~~to~~ to load and according to the derivative of the regulated parameter). (RZhMekh, No 9, 1955)

SHIFRIN, M.Sh., kandidat tekhnicheskikh nauk.

Effect of the static characteristics of the fuel control system on
the dynamics of steam pressure regulation in boilers. Sudostroenie
22 no.1:8-13 Ja '56. (MLRA 9:7)
(Boilers, Marine) (Steam engineering)

SHIFRIN, Moisey Shmerovich; SERDYUKOV, S.A., nauchnyy red.; SHAURAK, Ye.N.,
red.; KONTOROVICH, A.I., tekhn.red.

[Control of marine boiler installations] Regulirovanie sudovykh
kotel'nykh ustanovok. Leningrad, Gos.soiuznoe izd-vo sudostroit.
promyshl., 1957. 391 p. (MIRA 11:3)
(Boilers, Marine)

SHIFRIN, M.Sh., kandidat tekhnicheskikh nauk.

Current conditions and ways of developing over-all automatization
of ship power plants. Sudostroenie 23 no.1:27-33 Ja '57.

(MIRA 10:10)

(Electricity on ships) (Automatic control) (Steam engineering)

SHIFRIN, M.S.

SOV/122-58-6-34/37

Scientific and Engineering Conference on Design and Construction
Problems of Sea-going Merchant Vessels, Vest. Makh, No. 6, pp 13-14, 1958

The high efficiency of diesel engines was shown in the paper and their advantages which have ensured their widespread use in the range of powers between 10 000 and 15 000 hp were elucidated. M.S. Shifrin, Doctor of Technical Sciences, reported on the situation and development of integrated automation in ships' propulsion machinery and recorded the creation of regulating apparatus capable of full automation of all power services. Modern equipment is well on the way to provide a complete solution to the automation problem. Ya.B. Kantorovich, Candidate of Technical Sciences, considered in his paper the basic trends in the improvement of the technical and economic effectiveness of transport vessels. A.D. Chernov, A.M. Aksel'band, A.Kh. Starostenko and others discussed the need to improve steam turbines for ships' propulsion and the advisability of their use in the range of powers above 15 000 hp. G.A. Ogloblin reported on the development work in the field of gas turbines for ships' propulsion. The preparation of the manufacture of powerful slow-

Card 4/5

SHIFRIN, M.Sh., doktor tekhn. nauk.

Selecting a system of regulating the fuel combustion process in
marine boilers. Sudostroenie 24 no.2:22-25 F '58. (MIRA 11:3)
(Boilers, Marine) (Governors (Steam engine))

SHIFRIN, M.Sh., doktor tekhn.nauk

Operational results in the field of automatic control of marine steam-
power plants. Sudostroenie 25 no.1:43-48 Ja '59. (MIRA 12:3)
(Marine engines) (Automatic control)

SHIFRIN, M.SH., doktor tekhn.nauk

Selecting a level regulator diagram for marine steam boilers.
Sudostroenie 25 no.12:17-21 D '59. (MIRA 13:4)
(Boilers, Marine) (Liquid level indicators)

18

PHASE I BOOK EXPLOITATION SOV/5519

Kremlevskiy, P. P., Candidate of Technical Sciences, ed.

Teploenergeticheskiye i khimiko-tekhnologicheskiye pribory i regulatory
Instrument and Regulators in Heat-Power and Chemical Engineering
Moscow, Mashgiz, 1961. 207 p. Errata slip inserted. 8,500 copies
printed.

Ed. of Publishing House: G. A. Dudusova; Tech. Ed.: L. V. Shchetinina;
Managing Ed. for Literature on the Design and Operation of Machines,
Leningrad Department, Mashgiz: F. I. Fetisov, Engineer.

PURPOSE: This book is intended for engineers and technicians who construct,
' design, and operate industrial instruments and regulators.

COVERAGE: The book deals with new investigations in the field of automatic
checking and regulation of heat-power and chemical industrial processes.

The following problems are discussed: Improvement of two-position
control operation; effect of mass action and damping on proportional
control; new proportional plus integral and programming electronic
regulation systems; complete automation of open-hearth furnaces;
automation of boilers with variable load capacity; measurement of
pulsating flow; measurement of dust flow; ultrasonic and magnetic-
induction flowmeters; pneumatic compensating differential manome-
ters; aggressive-fluid flowmeters; new magnetic and optical-acous-
tical gas analyzers; concentration meters; and chlorine and coagulant
regulators. The book is the fifth in a series containing reports on the
investigations carried out by the Section on Heat-Engineering Control
Instrumentation and Automation of the Leningradskoye promyshlennost
Nauchno-tekhnicheskogo obshchestva priborostroitel'noy promyshlennosti
(Leningrad Branch of the Scientific and Technical Society of the Instru-
ment-Building Industry.) All the articles presented in this book were
discussed either at sessions of the Leningradskoye obshchestvo
nauchnikov i inzhenerov mekhanicheskikh i fizicheskikh nauk
measurements of mechanical quantities called by the section, the
VNIM (Vsesoyuznyy nauchno-issledovatel'skiy institut metrologii im.
D. I. Mendeleeva - All-Union Scientific Research Institute of
Metrology named D. I. Mendeleev), and the Leningradskiy dom
ucheniy im. A. M. Gor'kogo (Leningrad Home for Scientists imeni
A. M. Gor'kiy). No personalities are mentioned. There are 85 ref-
erences: 41 Soviet, 20 English, and 4 German. References accompany
most chapters.

TABLE OF CONTENTS:

Foreword

PART I. AUTOMATIC CONTROL
OF INDUSTRIAL PROCESSES

Ch. I. Kampe-Nemm, A. A. Two-Position Automatic Control and Methods of Improving Its Properties	5
1. Methods of improving properties of two-position control without changing the block diagram of the system	5
2. Discontinuous two-position control	8
3. Introduction of additional pulses to the rule of regulating according to the 1st and 2d derivatives	10
4. Increasing the number of inflow stages (three-position control)	13
5. Application of exponential feedbacks (two-position static and two-position proportional plus integral control)	14
Ch. II. Kats, A. M., and N. F. Gonenk. Investigation of Propor- tional Control, Taking Into Account the Mass of the Sensi- tive Element and Damping in the System Units	23
1. Equations for a control system with variable speed of the servomotor and inertia of the sensitive element	24

Одобрено

18

SOV/5519

Instruments and Regulators (Cont.)

2. Limit of system stability 26
3. Formation of transients 32
4. Equations for a control system with pure time delay 36

Ch. III. Strahun, A. Z. Automatic Regulators

1. Basic types of regulators 42
2. RU4-01 and RU4-06 regulators 42
3. RU4-15 regulator 44
4. RU4-16A regulator 49
5. RU3-01 and RU5-02 programming devices 51

Ch. IV. Dembovskiy, V. V., and S. V. Yurovetskiy. Complex Automation of Open-Hearth Furnaces

1. Programming elements of the circuit 56
2. Automatic correction of the programming of the thermal operating conditions 59
3. Automatic regulation of flame angle 61
4. Regulation of fuel oil consumption 83
5. Correction of fuel oil consumption by the frequency of throwing over the valves 84

Ch. V. Shifrin, M. Sh. Building Up Control Circuits for Steam-Boiler Systems

1. Regulation of boiler water-supply system 88
2. Regulation of combustion process in the boilers 72
3. Regulation of air and steam pressure 76

PART II. FLOW RATE MEASUREMENT

Ch. VI. Kremlevskiy, P. P. Criterion of Pulsating-Flow Damping 79

Ch. VII. Shaili, A. A. Application of Narrowing Devices for Measuring Dust Flow in a Pneumatic Traffic System 90

Ch. VIII. Khimunin, A. S. Ultrasonic Flowmeters

1. Phase method 101
2. Pulse-time method 107

Ch. IX. Zasedatelev, S. M., V. A. Rubadze, and K. A. Savell'-yeva. Pneumatic Compensating Differential Manometers

1. Errors in compensating differential manometers 115
2. Means for increasing operating reliability of membrane differential manometers 116
3. Differential manometers with pneumatic power compensation 124

Ch. X. Nikitin, B. I., L. D. Vel't, and V. K. Rukavishnikova. RI-Type Induction (Electromagnetic) Flowmeters 128

Ch. XI. Bushinskii, N. I. Tachometric Vane-Type Flowmeters for Sulphuric Acid 134

1. Measuring average flows 141
2. Measuring high flows 142
3. Measuring low flows 146

Ch. XII. Mikhaylov, B. P. Measuring the Flow of Aggressive Liquids 151

1. Inductive flowmeter for registration of quick-changing liquid flows 151
2. Tachometric vane-type liquid flowmeters 154
3. Measurement of extremely low flows 156

PART III. MEASUREMENT OF THE CONCENTRATION OF INDIVIDUAL COMPONENTS IN GASES AND LIQUIDS

ZBROZHEK, Vladimir Vatslavovich[deceased]; Prinsipali uchastiye:
SLUTSKIN, L.A., inzh.; FADEYEV, V.I., inzh.; SHIFRIN, M.Sh.,
doktor tekhn. nauk, prof., retsenzent; ANTONOVICH, S.A., kand.
tekhn. nauk, retsenzent; GARBER, Ye.D., nauchnyy red.; NIKITINA,
R.D., red.; KRYAKOVA, D.M., tekhn. red.

[Automatic control of ship systems]Avtomatika sudovyykh sistem.
Leningrad, Sudpromgiz, 1962. 145 p. (MIRA 15:10)
(Marine engineering) (Automatic control)

ANTONOVICH. Sergey Aleksandrovich; ~~SHIFRIN~~, M.Sh., doktor tekhn.nauk, retsn.; MERKIN, D.R., doktor fiziko-mat. nauk, prof., retsn.; FEDORKO, P.P., red.; VOLCHOK, K.M., tekhn. red.

[Fundamentals of the theory of automatic control] Osnovy teorii avtomaticheskogo regulirovaniia. Leningrad, Izd-vo "Rechnoi transport," 1962. 367 p. (MIRA 15:7)
(Automatic control)

BEREZIN, Sergey Yakovlevich; STARYNKEVICH, D.S., retsenzent; SHIFRIN, M.Sh., doktor tekhn. nauk, retsenzent; AFOSHIN, A.N., nauchnyy red.; SACHUK, N.A., red.; SHISHKOVA, L.M., tekhn. red.

[Design of automatic control systems using inverse amplitude-phase characteristics] Raschet sistem avtomaticheskogo regulirovaniia s pomoshch'iu obratnykh amplitudno-fazovykh kharakteristik. Leningrad, Sudpromgiz, 1962. 336 p.

(MIRA 15:10)

(Automatic control)

SHIFRIN, Moisey Shmerovich; NELEPIN, R.A., kand. tekhn. nauk, retsenzent; POLUEKTOV, R.A., kand. tekhn.nauk, retsenzent; PIVEN', V.D., doktor tekhn. nauk, nauchn. red.; VIAKOVA, Z.V., red.; CHISTYAKOVA, R.K., tekhn. red.; ERASTOVA, N.V., tekhn. red.

[Automatic control of marine steam power plants; theory and design] Avtomaticheskoe regulirovanie sudovykh parosilovykh ustanovok; teoriia i proektirovanie. Leningrad, Sudpromgiz, 1963. 586 p. (MIRA 16:10)
(Boilers, Marine) (Automatic control)

SHIFRIN, M.Sh., doktor tekhn. nauk; YUNG, V.N., inzh.

Control diagrams of the condensate system in marine steam turbine plants. Sudostroenie 28 no.1:29-34 Ja '62.

(MIRA 16:7)

(Steam turbines, Marine)

(Feed water regulation)

SHIFRIN, M.Sh., doktor tekhn.nauk; YUNG, V.N., inzh.; VOYTETSKIY, V.V., inzh.

Selecting a type of feedback in regulators of marine power plants.
Sudostroenie 29 no.10:22-26 0 '63. (MIRA 16:12)

ACC NO: AP0030837

SOURCE CODE: UR/0413/66/000/020/0041/0041

INVENTOR: Berezinskiy, V. I.; Vol'fenzon, M. N.; Zakharov, G. A.; Il'in, A. G.; Pavlova, Ye. A.; Skachkov, A. M.; Shifrin, M. Sh.; Eydlin, I. I.; Yung, V. N.

GRG: none

TITLE: System for automatic regulation of the steam-main operation of a marine turbine unit. Class 14, No. 187041

SOURCE: Izobreteniya, promyshlennyye obraztsy, tovarnyye znaki, no. 20, 1966, 41

TOPIC TAGS: turbine, steam turbine, engine turbine system, marine engine, marine engineering, *pressure regulator, automatic regulation*

ABSTRACT: An Author Certificate has been issued for a system for the automatic control of steam-main operation in marine-turbine units with steam takeoffs connected to units requiring dissimilar pressure, maintained by the use of pressure regulators, and to the cooled-steam circuit. To provide for the regulators' independent operation and to improve their functioning, the pressure regulators are connected parallel to the cooled-steam circuit. Orig. art. has: 1 figure.

SUB CODE: 13/ SUBM DATE: 12Jul65/

Cord 1/1

UDC: 621.625.225.1-53.8

SHIRIN, M.Sh., doktor tekhn. nauk

Full automation of ships. Sudostroenie 30 no.5:1-2 S 164.
(MIRA 17:11)

SHITRIN, Mikhail Yul'yevich; SOLOMOVICH, Moisey Yakovlevich; ARONOVICH, M.S.,
redaktor; GOLYATKINA, A.G., redaktor; MIKHAYLOVA, V.V., tekhnicheskii
redaktor

[The production of seamless rolled wheels and bands] Proizvodstvo
tsel'nokatanykh koles i bandazhei. Moskva, Gos. nauchno-tekhn. izd-
vo lit-ry po cherno i tsvetnoi metallurgii, 1954. 500 p. (MLRA 8:3)
(Car wheels)

SOV/137-58-11-23490

Translation from: Referativnyy zhurnal. Metallurgiya, 1958, Nr 11, p 235 (USSR)

AUTHOR: Shifrin, M. Yu.

TITLE: Modification in the Chemical Composition of Steel Employed in the Manufacture of Railroad Wheels (Izmeneniye khimicheskogo sostava kolesnoy stali v praktike proizvodstva zheleznodorozhnykh koles)

PERIODICAL: Byul. nauchno-tekhn. inform. Vses. n.-i. trubnyy in-t, 1958, Nr 4-5, pp 199-203

ABSTRACT: A survey. The trends toward the modification of chemical composition of steel employed in the manufacture of railroad wheels in the USA, Japan, and Germany are examined. The following topics are discussed: Reduction of C content in order to improve the resistance of railroad wheels to braking defects; employment of heat-treatment procedures which increase the wear resistance of wheel and rim steel, and alloying of the steel with Si, Cr, W, and Mo.

I. B.

Card 1/1

); 25(1)

PHASE I BOOK EXPLOITATION SOV/2698

Shifrin, Mikhail Yul'yevich

Defekty tsel'nokatanykh koles (Defects in Wrought Steel Wheels) Moscow, Metallurgizdat, 1959. 202 p. Errata slip inserted. 1,500 copies printed.

Ed.: N.V. Manakin; Ed. of Publishing House: A.L. Ozeretskaya; Tech. Ed.: A.I. Karasev.

PURPOSE: This book is intended for engineering and technical personnel in wheel-rolling mills and for railroad workers. It may also be useful to students of vuzes.

COVERAGE: The author discusses defects occurring in wrought steel wheels. Causes of such defects and the possibility of preventing them are analyzed. Types of defects, testing procedures and results, and methods of eliminating rejects are included. No personalities are mentioned. There are 46 references: 42 Soviet, and 4 English.

TABLE OF CONTENTS:

Card 1/6

Defects in Wrought Steel Wheels

SOV/2698

Ch. III. Hub Defects

46

46

49

50

54

56

57

59

62

64

66

1. Underfills
2. Eccentricity of the hub in relation to the wheel tread circle
3. Causes of eccentricity
4. Production data on the magnitude of eccentricity
5. Detecting eccentricity during manufacture
6. Measures for preventing eccentricity
7. Correcting the eccentricity of a finished wheel
8. Nonuniformity of hub walls
9. Location of the hub in relation to the wheel rim
10. Hub oval

Ch. IV. Defects of Rim and Web

68

68

73

80

84

85

89

91

1. Deviations in web thickness
2. Deviations in tread circle diameter
3. Measures for preventing deviations in tread circle diameter
4. Ovalness of wrought steel wheels
5. Causes of ovalness
6. Effect of ovalness of wrought wheels on subsequent working stages
7. Measures for eliminating ovalness

Card 3/6

Defects in Wrought Steel Wheels	SOV/2698	
2. Cracks in finished wheels		124
3. Measures for eliminating cracks		127
Ch. VIII. Scaling		129
1. Nature and properties of scaling		129
2. Negative phenomena connected with the presence of scaling		132
3. Pressing scale into metal		133
4. Methods of removing scaling		134
Ch. IX. Porosity of Hub or Web		138
1. Characteristics of the defect		138
2. Cause of porosity formation		142
3. Measures for eliminating porosity		144
Ch. X. Laps		147
1. Characteristics of the defect		147
2. Cause of lap formation		149
3. Methods of preventing lap formations		167

PART THREE. RESULTS OF TESTING WROUGHT STEEL WHEELS

Card 5/6

Defects in Wrought Steel Wheels

SOV/2698

Ch. XI. Wheel Rejects Based on Unsatisfactory Mechanical Properties	169
1. Characteristics of rejects based on unsatisfactory mechanical properties	169
2. Production data on mechanical properties of wrought steel wheels	172
Ch. XII. Wheel Rejects Based on Unsatisfactory Impact Tests	181
1. Character and peculiarities of impact tests	181
2. Production data on results of impact tests on wheels	185
3. Causes of unsatisfactory impact test results	185
4. Measures for eliminating rejects based on impact tests	198

Bibliography	201
--------------	-----

AVAILABLE: Library of Congress (TF 383.S49)

Card 6/6

GO/jb
1-28-60

S/182/60/000/010/009/015/XX
A161/A030

AUTHOR: Shifrin, M. Yu.

TITLE: Gaging the Tools of the Shaping and Bending Presses of a Wheel Rolling Unit

PERIODICAL: Kuznechno-shtampovochnoye proizvodstvo, 1960, No. 10, pp. 15 - 19

TEXT: The complex process of shaping wheel blanks for rolling in a wheel rolling shop is discussed and all elements of the dies are analyzed and calculated. A shaping die set (Fig. 1) must guarantee the required hub dimensions and disc thickness at the hub, so that these wheel portions are not more deformed in the further processes. Practical recommendations are given concerning the allowances for machining, the taper of side surfaces, diameters, minding that heat treatment of the shaping press tools is not practiced in the Soviet wheel-rolling shops and the dimensions of a freshly installed die change after the formation of several blanks. The usual dies shrink 3 - 4 mm in diameter. Forming rings used in Soviet and foreign practice have a conical inner surface (Fig. 3); a new inner surface shape had been suggested for lighter wheel types. (Fig. 4). It reduced the deformation of the outer wheel blank surface in the first moment of rolling, which

Card 1/4

S/182/60/000/010/009/015/XX
A161/A030

Gaging the Tools of the Shaping and Bending Presses of a Wheel Rolling Unit

reduces the eccentricity of the hub in relation to the rolling surface. The calculation principle is the same as for the ring with conical bore, with a little dimensions correction. The method of static moments is used for calculation of the metal volume that must be concentrated in the rim of the wheel blank (Fig. 5). The new rings with "stepped gaging" (Fig. 4) have only been used little, and their optimum dimensions have not yet been established. Presently, the top portion is made with the usual taper 1:4 on 40 mm height, and the remaining portion is tapered 1:5. The shape and tapers of shaping press mandrel (Fig. 6) are discussed. It is mentioned that the imeni K. Liebknecht Plant uses mandrels of 425 mm length. The shape elements of wheel bending dies (Fig. 7) are also discussed and calculated. The bending of the wheel disc and the gaging of the rim is produced on the bending press after rolling on the rolling mill. It is mentioned that a die with a central portion that is longer than usual has been made for forging lightened wheels with a longer hub. There are 9 figures.

Card 2/4

S/182/60/000/010/009/015/XX
A161/A030

Gaging the Tools of the Shaping and Bending Presses of a Wheel Rolling Unit

Figure 5:


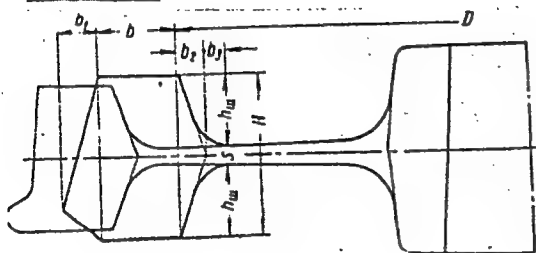


Figure 6:

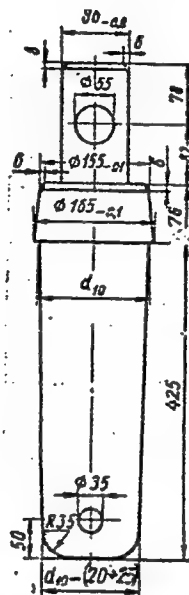

Card 4/4

S/182/60/000/011/003/016
A161/A029

AUTHORS: Shifrin, M.Yu., Kovalenko, Yu.Ye., Kolesnik, B.P., Polyakova, N.K., Kharkhorin, A.M.

TITLE: Development of Technology for Manufacture of Hollow Axles

PERIODICAL: Kuznechno-shtampovochnoye proizvodstvo, 1960, No. 11, pp.11-15

TEXT: The problem of hollow axles for rolling stock on railroads could not be solved up to now. The authors have suggested to manufacture hollow axles from hollow rolled blanks and the Uralvagonzavod plant has developed axle designs in cooperation with the Ukrainskiy nauchno-issledovatel'skiy trubnyy institut (Ukrainian Scientific Tube Research Institute) (Fig. 1, axle for plain bearings, Fig. 2, for roller bearings). Experiments were carried out with billets rolled in an automatic tube rolling mill from "45" steel per GOST 1050-57 (GOST 1050-57) standard of the following composition: (%) 0.44 C; 0.63 Mn; 0.25 Si; 0.28 S; 0.021 P; 0.13 Cr. Blanks of 230 mm diameter were pierced in a piercing mill, rolled in an automatic "220" or "400" mill with three passes, then reheated and forged on the ends in an especially designed three-impression die (Fig. 4), or in Card 1/8

S/182/60/000/011/003/016
A161/A029

Development of Technology for Manufacture of Hollow Axles

a single-impression die (Fig. 5) for plain or roller bearings, respectively (Fig. 7 and 8). Ends were forged with a mandrel to maintain the hole in the axle trunnions. The axle wall thickness was uneven on account of the twisting of the metal in the piercing process, but this helical line of higher or lower wall thickness did not disbalance the entire axle too much. As wall unevenness can increase on account of buckling of rough axles, straightening of the rough rolled axle must be made obligatory in the manufacturing process. The axles were normalized in a continuous furnace with $840 \pm 10^\circ\text{C}$ for 5 h 30 min and cooled in the air. The macrostructure of the trunnions metal was dense and sound with fibers following the axle outline without interruptions and with insignificant segregation of sulfur towards the inner surface. The mechanical properties were above the standard requirements and partly even higher than the mechanical properties of solid axles. The weight of the axles varied between 328 and 348 kg compared with 428 kg of a solid standard axle. When techniques will be improved, the weight of the hollow axle for roller bearings may be further reduced to

Card 2/8

S/182/60/000/011/003/016
A161/A029

Development of Technology for Manufacture of Hollow Axles

310-318 kg. The conclusion is drawn that manufacture of hollow axles from rolled blanks by rolling and subsequent forging of the ends is feasible. Fatigue tests of hollow axles are necessary, but a rolling shop project for manufacturing hollow axles may be developed without waiting for the test results, for hollow axle blanks can be produced by existing equipment. The recommended production equipment includes a machine for making hollow blanks, a three-high helical cross rolling mill ("stan poperechno-vintovoy prokatki") and hydraulic presses for forging the axle ends.

Card 3/8

S/182/60/000/011/003/016
A161/A029

Development of Technology for Manufacture of Hollow Axles

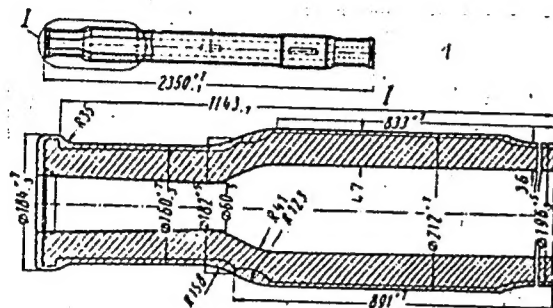


Fig. 1: Hollow axle for plain bearings

Card 4/8